




Commercial Lighting

WELCOME to EGLO's innovative range of **commercial Range** — where cutting-edge technology meets sleek, modern design. Engineered for performance and efficiency, our collection delivers **exceptional illumination, energy savings,** and **user-friendly** controls designed to meet the demands of professional and commercial environments.

This year, we are redefining lighting for workspaces, retail, hospitality, and more. Our **flexible track systems** offer dynamic layout options, while our **LED Lights** provide powerful, uniform brightness with a refined aesthetic that complements any professional setting.

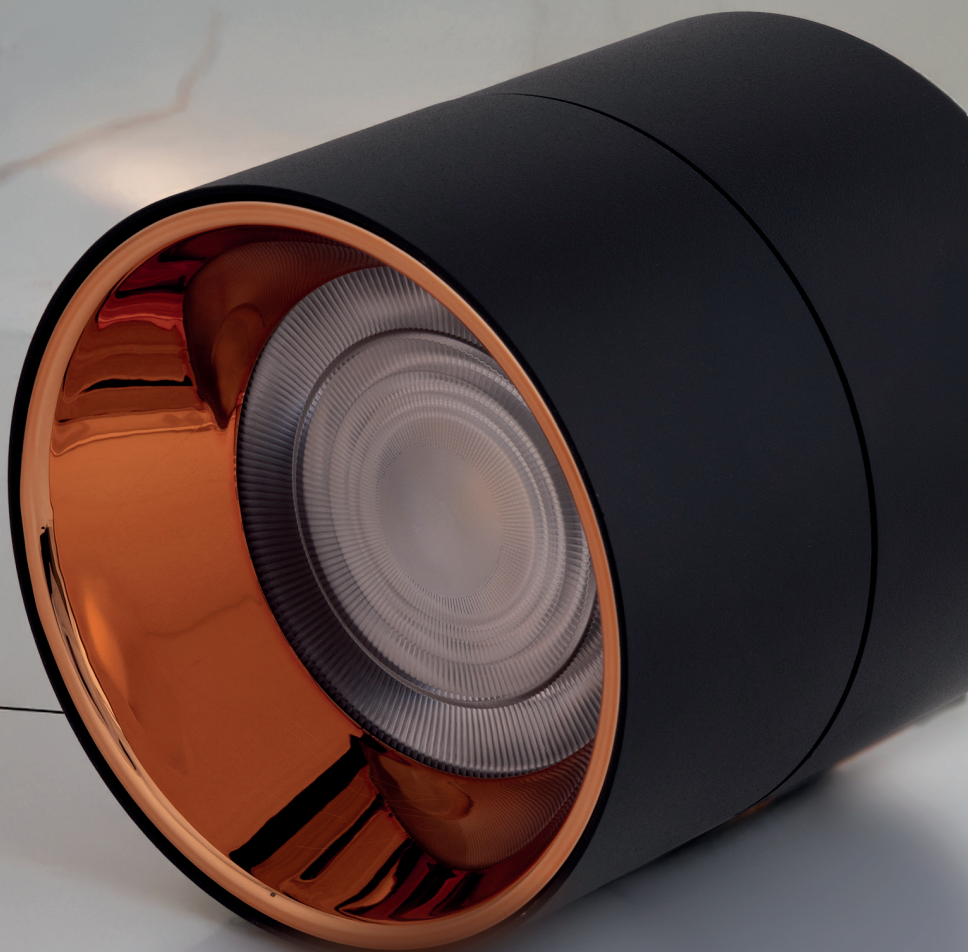

GLO





CONTENT

5



PC FRAME COB DOWN LIGHT
SWIVEL / ADJUSTABLE TYPE

13



COLOUR REFLECTOR COB
DOWN LIGHT

21



CYLINDRICAL SURFACE COB
DOWN LIGHT

29



CYLINDRICAL SURFACE COB
DOWN LIGHT (WITH LENS)

33



CYLINDRICAL SURFACE DL
SWIVEL / ADJUSTABLE TYPE

39



COB DOWN LIGHT
ADJUSTABLE SERIES

47



COB DOWN LIGHT
GREY

55



ROYAL COB DOWN LIGHT
LOW TRIM

63



DOB PC PANEL LIGHT
ROUND / SQUARE



PC FRAME COB DOWN LIGHT
SWIVEL / ADJUSTABLE TYPE





LED

IP20



HOUSING COLOR
Black
REFLECTOR COLOUR
Rose Gold



HOUSING COLOR
White
REFLECTOR COLOUR
Chrome



HOUSING COLOR
Black
REFLECTOR COLOUR
Chrome

PC FRAME COB DOWN LIGHT

SWIVEL / ADJUSTABLE TYPE

Material

Aluminium Housing With Plastic Frame

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY





TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A1-6-W-BCH	6 W	3000 K	≥80	220 - 240 V ac	540 lm	72	43	50
A1-6-N-BCH	6 W	4000 K	≥80	220 - 240 V ac	570 lm	72	43	50
A1-6-C-BCH	6 W	6500 K	≥80	220 - 240 V ac	600 lm	72	43	50
A1-6-W-BRG	6 W	3000 K	≥80	220 - 240 V ac	540 lm	72	43	50
A1-6-N-BRG	6 W	4000 K	≥80	220 - 240 V ac	570 lm	72	43	50
A1-6-C-BRG	6 W	6500 K	≥80	220 - 240 V ac	600 lm	72	43	50
A1-6-W-WCH	6 W	3000 K	≥80	220 - 240 V ac	540 lm	72	43	50
A1-6-N-WCH	6 W	4000 K	≥80	220 - 240 V ac	570 lm	72	43	50
A1-6-C-WCH	6 W	6500 K	≥80	220 - 240 V ac	600 lm	72	43	50

LED

IP20



HOUSING COLOR
Black

REFLECTOR COLOUR
Chrome



HOUSING COLOR
White

REFLECTOR COLOUR
Chrome



HOUSING COLOR
Rose Gold

REFLECTOR COLOUR
Chrome

PC FRAME COB DOWN LIGHT

SWIVEL / ADJUSTABLE TYPE

Material

Aluminium Housing With Plastic Frame

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY





TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A2-12-W-BCH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	83	53	50
A2-12-N-BCH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	83	53	50
A2-12-C-BCH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	83	53	50
A2-12-W-BRG	12 W	3000 K	≥80	220 - 240Vac	1080 lm	83	53	50
A2-12-N-BRG	12 W	4000 K	≥80	220 - 240Vac	1140 lm	83	53	50
A2-12-C-BRG	12 W	6500 K	≥80	220 - 240Vac	1200 lm	83	53	50
A2-12-W-WCH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	83	53	50
A2-12-N-WCH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	83	53	50
A2-12-C-WCH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	83	53	50

LED

IP20



HOUSING COLOR
Black

REFLECTOR COLOUR
Chrome



HOUSING COLOR
White

REFLECTOR COLOUR
Chrome



HOUSING COLOR
Rose Gold

REFLECTOR COLOUR
Chrome

PC FRAME COB DOWN LIGHT

SWIVEL / ADJUSTABLE TYPE

Material

Aluminium Housing With Plastic Frame

Mounting

Recessed Light

Temperature

-10°C to +45°C

IS 10322
(Part 5/Sec 2) : 2012



R-93038270
www.bis.gov.in


IS 15885
(Part 2/Sec 13) : 2012



R-93038105
www.bis.gov.in



Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A3-18-W-BCH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	105	63	50
A3-18-N-BCH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	105	63	50
A3-18-C-BCH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	105	63	50
A3-18-W-BRG	18 W	3000 K	≥80	220 - 240Vac	1620 lm	105	63	50
A3-18-N-BRG	18 W	4000 K	≥80	220 - 240Vac	1710 lm	105	63	50
A3-18-C-BRG	18 W	6500 K	≥80	220 - 240Vac	1800 lm	105	63	50
A3-18-W-WCH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	105	63	50
A3-18-N-WCH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	105	63	50
A3-18-C-WCH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	105	63	50

COLOUR REFLECTOR COB

DOWN LIGHT





LED

IP20



HOUSING COLOR
Black

REFLECTOR COLOUR
Chrome



HOUSING COLOR
White

REFLECTOR COLOUR
Chrome



HOUSING COLOR
Rose Gold

REFLECTOR COLOUR
Chrome

COLOUR REFLECTOR COB

DOWN LIGHT

Material

Aluminium Housing With Plastic Frame

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY

 Surge Protection
upto 2.5kV

 Long Life
upto 30,000 Hours

 Energy Saving
upto 80%

TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A4-06-W-BCH	6 W	3000 K	≥80	220 - 240Vac	500 lm	64	50	50
A4-06-N-BCH	6 W	4000 K	≥80	220 - 240Vac	550 lm	64	50	50
A4-06-C-BCH	6 W	6500 K	≥80	220 - 240Vac	600 lm	64	50	50
A4-06-W-BRG	6 W	3000 K	≥80	220 - 240Vac	500 lm	64	50	50
A4-06-N-BRG	6 W	4000 K	≥80	220 - 240Vac	550 lm	64	50	50
A4-06-C-BRG	6 W	6500 K	≥80	220 - 240Vac	600 lm	64	50	50
A4-06-W-WCH	6 W	3000 K	≥80	220 - 240Vac	500 lm	64	50	50
A4-06-N-WCH	6 W	4000 K	≥80	220 - 240Vac	550 lm	64	50	50
A4-06-C-WCH	6 W	6500 K	≥80	220 - 240Vac	600 lm	64	50	50

LED

IP20



HOUSING COLOR
Black

REFLECTOR COLOUR
Chrome



HOUSING COLOR
White

REFLECTOR COLOUR
Chrome



HOUSING COLOR
Rose Gold

REFLECTOR COLOUR
Chrome

COLOUR REFLECTOR COB

DOWN LIGHT

Material

Aluminium Housing With Plastic Frame

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A5-12-W-BCH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	84	59	50
A5-12-N-BCH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	84	59	50
A5-12-C-BCH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	84	59	50
A5-12-W-BRG	12 W	3000 K	≥80	220 - 240Vac	1080 lm	84	59	50
A5-12-N-BRG	12 W	4000 K	≥80	220 - 240Vac	1140 lm	84	59	50
A5-12-C-BRG	12 W	6500 K	≥80	220 - 240Vac	1200 lm	84	59	50
A5-12-W-WCH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	84	59	50
A5-12-N-WCH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	84	59	50
A5-12-C-WCH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	84	59	50

LED

IP20



HOUSING COLOR
Black

REFLECTOR COLOUR
Chrome



HOUSING COLOR
White

REFLECTOR COLOUR
Chrome



HOUSING COLOR
Rose Gold

REFLECTOR COLOUR
Chrome

COLOUR REFLECTOR COB

DOWN LIGHT

Material

Aluminium Housing With Plastic Frame

Mounting

Recessed Light

Temperature

-10°C to +45°C



2 YEARS
WARRANTY


 Surge Protection
upto 2.5kV

 Long Life
upto 30,000 Hours

 Energy Saving
upto 80%



Polar diagram



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A6-18-W-BCH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	108	67	50
A6-18-N-BCH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	108	67	50
A6-18-C-BCH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	108	67	50
A6-18-W-BRG	18 W	3000 K	≥80	220 - 240Vac	1620 lm	108	67	50
A6-18-N-BRG	18 W	4000 K	≥80	220 - 240Vac	1710 lm	108	67	50
A6-18-C-BRG	18 W	6500 K	≥80	220 - 240Vac	1800 lm	108	67	50
A6-18-W-WCH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	108	67	50
A6-18-N-WCH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	108	67	50
A6-18-C-WCH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	108	67	50


CYLINDRICAL SURFACE COB DOWN LIGHT





LED

IP20



HOUSING COLOR
Black
REFLECTOR COLOUR
Rose Gold



HOUSING COLOR
White
REFLECTOR COLOUR
Chrome

CYLINDRICAL SURFACE COB

DOWN LIGHT

Material

Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A11-12-W-BRG	12 W	3000 K	≥80	220 - 240Vac	1080 lm	72	95	50
A11-12-N-BRG	12 W	4000 K	≥80	220 - 240Vac	1140 lm	72	95	50
A11-12-C-BRG	12 W	6500 K	≥80	220 - 240Vac	1200 lm	72	95	50
A11-12-W-BCH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	72	95	50
A11-12-N-BCH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	72	95	50
A11-12-C-BCH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	72	95	50

LED

IP20



HOUSING COLOR
Black

REFLECTOR COLOUR
Rose Gold



HOUSING COLOR
White

REFLECTOR COLOUR
Black Chrome

CYLINDRICAL SURFACE COB

DOWN LIGHT

Material

Aluminium Housing

Mounting

Recessed Light

Temperature

-10°C to +45°C



IS 10322
(Part 5/Sec 1) : 2012




R-93039381
www.bis.gov.in

IS 15885
(Part 2/Sec 13) : 2012



R-93038105
www.bis.gov.in

Polar diagram



2 YEARS
WARRANTY


Surge Protection
upto 2.5kV


Long Life
upto 30,000 Hours



Energy Saving
upto 80%

TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A12-18-W-WBCH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	72	125	50
A12-18-N-WBCH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	72	125	50
A12-18-C-WBCH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	72	125	50
A12-18-W-BRG	18 W	3000 K	≥80	220 - 240Vac	1620 lm	72	125	50
A12-18-N-BRG	18 W	4000 K	≥80	220 - 240Vac	1710 lm	72	125	50
A12-18-C-BRG	18 W	6500 K	≥80	220 - 240Vac	1800 lm	72	125	50

LED

IP20



HOUSING COLOR

White

REFLECTOR COLOUR
Black Chrome



HOUSING COLOR

Black

REFLECTOR COLOUR
Rose Gold

CYLINDRICAL SURFACE COB

DOWN LIGHT

Material

Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A14-12-W-BRG	12 W	3000 K	≥80	220 - 240Vac	1080 lm	95	100	50
A14-12-N-BRG	12 W	4000 K	≥80	220 - 240Vac	1140 lm	95	100	50
A14-12-C-BRG	12 W	6500 K	≥80	220 - 240Vac	1200 lm	95	100	50
A14-12-W-BCH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	95	100	50
A14-12-N-BCH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	95	100	50
A14-12-C-BCH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	95	100	50


CYLINDRICAL SURFACE COB
DOWN LIGHT (WITH LENS)





LED

IP20



HOUSING COLOR
White
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
Black
REFLECTOR COLOUR
Rose Gold

CYLINDRICAL SURFACE COB

DOWN LIGHT (WITH LENS)

Material

Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A15-18-W-BCH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	95	100	50
A15-18-W-BCH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	95	100	50
A15-18-W-BCH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	95	100	50
A15-18-W-BRG	18 W	3000 K	≥80	220 - 240Vac	1620 lm	95	100	50
A15-18-N-BRG	18 W	4000 K	≥80	220 - 240Vac	1710 lm	95	100	50
A15-18-C-BRG	18 W	6500 K	≥80	220 - 240Vac	1800 lm	95	100	50



CYLINDRICAL SURFACE DL
SWIVEL / ADJUSTABLE TYPE





LED

IP20



HOUSING COLOR
Black

REFLECTOR COLOUR
Rose Gold



HOUSING COLOR
White

REFLECTOR COLOUR
Black Chrome

CYLINDRICAL SURFACE DL

SWIVEL / ADJUSTABLE TYPE

Material

Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY






TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A17-12-W-BRG	12 W	3000 K	≥80	220 - 240Vac	1080 lm	78	97	50
A17-12-W-BRG	12 W	4000 K	≥80	220 - 240Vac	1140 lm	78	97	50
A17-12-W-BRG	12 W	6500 K	≥80	220 - 240Vac	1200 lm	78	97	50
A17-12-W-BCH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	78	97	50
A17-12-W-BCH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	78	97	50
A17-12-W-BCH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	78	97	50

LED

IP20



HOUSING COLOR
Black

REFLECTOR COLOUR
Rose Gold



HOUSING COLOR
White

REFLECTOR COLOUR
Black Chrome

CYLINDRICAL SURFACE DL

SWIVEL / ADJUSTABLE TYPE

Material

Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A18-18-W-BCH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	88	109	50
A18-18-W-BCH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	88	109	50
A18-18-W-BCH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	88	109	50
A18-18-W-BRG	18 W	3000 K	≥80	220 - 240Vac	1620 lm	88	109	50
A18-18-W-BRG	18 W	4000 K	≥80	220 - 240Vac	1710 lm	88	109	50
A18-18-W-BRG	18 W	6500 K	≥80	220 - 240Vac	1800 lm	88	109	50


COB DOWN LIGHT
ADJUSTABLE SERIES





LED

IP20



HOUSING COLOR
White
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
White
REFLECTOR COLOUR
Chrome

COB DOWN LIGHT

ADJUSTABLE SERIES

Material

Aluminium Housing

Mounting

Recessed Light

Temperature

-10°C to +45°C



IS 10322
(Part 5/Sec 2) : 2012




R-93038270
www.bis.gov.in

IS 15885
(Part 2/Sec 13) : 2012



R-93038105
www.bis.gov.in

Polar diagram



— CO - C180 — C90 - C270
Beam angle (50%) : 36 degree

2 YEARS
WARRANTY



Surge Protection
upto 2.5kV



Long Life
upto 30,000 Hours



Energy Saving
upto 80%

TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A25-07-W-BCH	6 W	3000 K	≥80	220 - 240Vac	490 lm	65	80	50
A25-07-N-BCH	6 W	4000 K	≥80	220 - 240Vac	525 lm	65	80	50
A25-07-C-BCH	6 W	6500 K	≥80	220 - 240Vac	560 lm	65	80	50
A25-07-W-WCH	6 W	3000 K	≥80	220 - 240Vac	490 lm	65	80	50
A25-07-N-WCH	6 W	4000 K	≥80	220 - 240Vac	525 lm	65	80	50
A25-07-C-WCH	6 W	6500 K	≥80	220 - 240Vac	560 lm	65	80	50

LED

IP20



HOUSING COLOR
White
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
White
REFLECTOR COLOUR
Chrome

COB DOWN LIGHT

ADJUSTABLE SERIES

Material

Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY




TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A26-12-W-BCH	12 W	3000 K	≥80	220 - 240Vac	840 lm	85	79	50
A26-12-N-BCH	12 W	4000 K	≥80	220 - 240Vac	900 lm	85	79	50
A26-12-C-BCH	12 W	6500 K	≥80	220 - 240Vac	960 lm	85	79	50
A26-12-W-WCH	12 W	3000 K	≥80	220 - 240Vac	840 lm	85	79	50
A26-12-N-WCH	12 W	4000 K	≥80	220 - 240Vac	900 lm	85	79	50
A26-12-C-WCH	12 W	6500 K	≥80	220 - 240Vac	960 lm	85	79	50

LED

IP20



HOUSING COLOR
White
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
White
REFLECTOR COLOUR
Chrome

COB DOWN LIGHT

ADJUSTABLE SERIES

Material

Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A27-18-W-BCH	18 W	3000 K	≥80	220 - 240Vac	1260 lm	85	88	50
A27-18-N-BCH	18 W	4000 K	≥80	220 - 240Vac	1350 lm	85	88	50
A27-18-C-BCH	18 W	6500 K	≥80	220 - 240Vac	1440 lm	85	88	50
A27-18-W-WCH	18 W	3000 K	≥80	220 - 240Vac	1260 lm	85	88	50
A27-18-N-WCH	18 W	4000 K	≥80	220 - 240Vac	1350 lm	85	88	50
A27-18-C-WCH	18 W	6500 K	≥80	220 - 240Vac	1440 lm	85	88	50

COB DOWN LIGHT


GREY





LED

IP20



HOUSING COLOR
Grey
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
Grey
REFLECTOR COLOUR
Chrome

COB DOWN LIGHT

GREY

Material


Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C

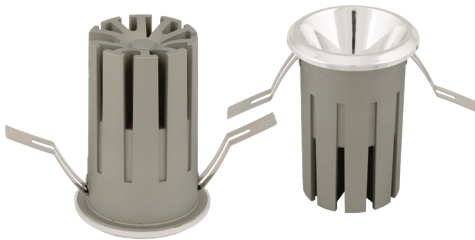

Polar diagram



2 YEARS
WARRANTY





TECHNICAL DETAILS


Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A29-06-W-BCH	6 W	3000 K	≥80	220 - 240Vac	540 lm	52	72	50
A29-06-N-BCH	6 W	4000 K	≥80	220 - 240Vac	570 lm	52	72	50
A29-06-C-BCH	6 W	6500 K	≥80	220 - 240Vac	600 lm	52	72	50
A29-06-W-CH	6 W	3000 K	≥80	220 - 240Vac	540 lm	52	72	50
A29-06-N-CH	6 W	4000 K	≥80	220 - 240Vac	570 lm	52	72	50
A29-06-C-CH	6 W	6500 K	≥80	220 - 240Vac	600 lm	52	72	50

LED

IP20



HOUSING COLOR
Grey
REFLECTOR COLOUR
Black Chrome

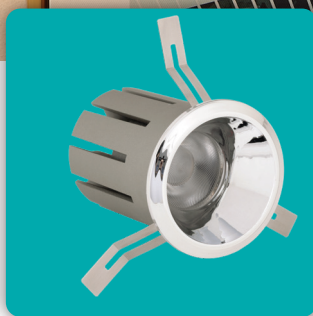

HOUSING COLOR
Grey
REFLECTOR COLOUR
Chrome

COB DOWN LIGHT

GREY

Material


Aluminium Housing

Mounting

Recessed Light

Temperature

-10°C to +45°C

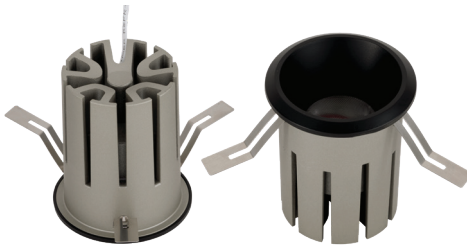

IS 10322
(Part 6/Sec 2) : 2012




R-93038270
www.bis.gov.in

IS 15885
(Part 2/Sec 13) : 2012



R-93038105
www.bis.gov.in

Polar diagram



2 YEARS
WARRANTY

 Surge Protection
upto 2.5kV

 Long Life
upto 30,000 Hours



 Energy Saving
upto 80%

TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A30-12-W-BCH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	62	72	50
A30-12-N-BCH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	62	72	50
A30-12-C-BCH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	62	72	50
A30-12-W-CH	12 W	3000 K	≥80	220 - 240Vac	1080 lm	62	72	50
A30-12-N-CH	12 W	4000 K	≥80	220 - 240Vac	1140 lm	62	72	50
A30-12-C-CH	12 W	6500 K	≥80	220 - 240Vac	1200 lm	62	72	50

LED

IP20



HOUSING COLOR
Grey
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
Grey
REFLECTOR COLOUR
Chrome

COB DOWN LIGHT

GREY

Material

Aluminium Housing

Mounting

Recessed Light

Temperature

-10°C to +45°C



IS 10322
(Part 5/Sec 2) : 2012




R-93038270
www.bis.gov.in

IS 15885
(Part 2/Sec 13) : 2012



R-93038105
www.bis.gov.in

Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A31-18-W-BCH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	82	82	50
A31-18-N-BCH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	82	82	50
A31-18-C-BCH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	82	82	50
A31-18-W-CH	18 W	3000 K	≥80	220 - 240Vac	1620 lm	82	82	50
A31-18-N-CH	18 W	4000 K	≥80	220 - 240Vac	1710 lm	82	82	50
A31-18-C-CH	18 W	6500 K	≥80	220 - 240Vac	1800 lm	82	82	50


ROYAL COB DOWN LIGHT
LOW TRIM





LED

IP20



HOUSING COLOR
Grey
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
Grey
REFLECTOR COLOUR
Chrome

ROYAL COB DOWN LIGHT

LOW TRIM

Material

Aluminium Housing

Mounting

Recessed Light

Temperature

-10°C to +45°C



IS 10322
(Part 5/Sec 2) : 2012




R-93038270
www.bis.gov.in

IS 15885
(Part 2/Sec 13) : 2012



R-93038105
www.bis.gov.in

Polar diagram



2 YEARS
WARRANTY





TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A36-06-W-G	6 W	3000 K	≥80	220 - 240Vac	540 lm	50	60	50
A36-06-N-G	6 W	4000 K	≥80	220 - 240Vac	570 lm	50	60	50
A36-06-C-G	6 W	6500 K	≥80	220 - 240Vac	600 lm	50	60	50
A36-06-W-C	6 W	3000 K	≥80	220 - 240Vac	540 lm	50	60	50
A36-06-N-C	6 W	4000 K	≥80	220 - 240Vac	570 lm	50	60	50
A36-06-C-C	6 W	6500 K	≥80	220 - 240Vac	600 lm	50	60	50

LED

IP20

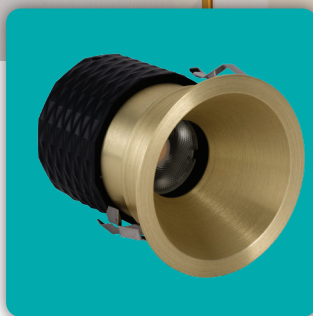

HOUSING COLOR
Grey
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
Grey
REFLECTOR COLOUR
Chrome

ROYAL COB DOWN LIGHT

LOW TRIM

Material

Aluminium Housing

Mounting

Recessed Light

Temperature

-10°C to +45°C



IS 10322
(Part 5/Sec 2) : 2012




R-93038270
www.bis.gov.in

IS 15885
(Part 2/Sec 13) : 2012



R-93038105
www.bis.gov.in

Polar diagram



— CO - C180 — C90 - C270
Beam angle (50%) : 36 degree

2 YEARS
WARRANTY



TECHNICAL DETAILS


Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A37-12-W-G	12 W	3000 K	≥80	220 - 240Vac	1080 lm	65	70	50
A37-12-N-G	12 W	4000 K	≥80	220 - 240Vac	1140 lm	65	70	50
A37-12-C-G	12 W	6500 K	≥80	220 - 240Vac	1200 lm	65	70	50
A37-12-W-C	12 W	3000 K	≥80	220 - 240Vac	1080 lm	65	70	50
A37-12-N-C	12 W	4000 K	≥80	220 - 240Vac	1140 lm	65	70	50
A37-12-C-C	12 W	6500 K	≥80	220 - 240Vac	1200 lm	65	70	50

LED

IP20



HOUSING COLOR
Grey
REFLECTOR COLOUR
Black Chrome



HOUSING COLOR
Grey
REFLECTOR COLOUR
Chrome

ROYAL COB DOWN LIGHT

LOW TRIM

Material

Aluminium Housing

Mounting


Recessed Light

Temperature

-10°C to +45°C



Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						Ø	H	
A38-12-W-G	18 W	3000 K	≥80	220 - 240Vac	1620 lm	80	80	50
A38-12-N-G	18 W	4000 K	≥80	220 - 240Vac	1710 lm	80	80	50
A38-12-C-G	18 W	6500 K	≥80	220 - 240Vac	1800 lm	80	80	50
A38-12-W-C	18 W	3000 K	≥80	220 - 240Vac	1620 lm	80	80	50
A38-12-W-C	18 W	4000 K	≥80	220 - 240Vac	1710 lm	80	80	50
A38-12-N-C	18 W	6500 K	≥80	220 - 240Vac	1800 lm	80	80	50


DOB PC PANEL LIGHT
ROUND / SQUARE






LED

IP20



HOUSING COLOR
White



HOUSING COLOR
white

DOB PC PANEL LIGHT

ROUND / SQUARE

Material

Plastic Housing

Mounting

Recessed Light

Temperature


-10°C to +45°C

Degree of protection

IP20



Polar diagram



2 YEARS
WARRANTY

 Surge Protection
upto 2.5kV

 Long Life
upto 30,000 Hours



 Energy Saving
upto 80%

TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						B / Ø	H	
A43-06-W-R	6 W	3000 K	≥80	220 - 240Vac	420 lm	95	28	50
A43-06-N-R	6 W	4000 K	≥80	220 - 240Vac	450 lm	95	28	50
A43-06-C-R	6 W	6500 K	≥80	220 - 240Vac	480 lm	95	28	50
A46-06-W-S	6 W	3000 K	≥80	220 - 240Vac	420 lm	95	28	50
A46-06-N-S	6 W	4000 K	≥80	220 - 240Vac	450 lm	95	28	50
A46-06-C-S	6 W	6500 K	≥80	220 - 240Vac	480 lm	95	28	50

LED

IP20



HOUSING COLOR
White



HOUSING COLOR
White

DOB PC PANEL LIGHT

ROUND / SQUARE

Material

Plastic Housing

Mounting

Recessed Light

Temperature

-10°C to +45°C

Degree of protection


IP20



IS 10322
(Part 5/Sec 2) : 2012



Polar diagram



2 YEARS
WARRANTY

 Surge Protection
upto 2.5kV

 Long Life
upto 30,000 hours


 Energy Saving
upto 80%

TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Lumen	Dimensions(mm)		Frequency (Hz)
						B / Ø	H	
A44-12-W-R	12 W	3000 K	≥80	220 - 240Vac	840 lm	129	28	50
A44-12-N-R	12 W	4000 K	≥80	220 - 240Vac	900 lm	129	28	50
A44-12-C-R	12 W	6500 K	≥80	220 - 240Vac	960 lm	129	28	50
A47-12-W-S	12 W	3000 K	≥80	220 - 240Vac	840 lm	129	28	50
A47-12-N-S	12 W	4000 K	≥80	220 - 240Vac	900 lm	129	28	50
A47-12-C-S	12 W	6500 K	≥80	220 - 240Vac	960 lm	129	28	50

LED

IP20



HOUSING COLOR
White



HOUSING COLOR
White

DOB PC PANEL LIGHT

ROUND / SQUARE

Material

Plastic Housing

Mounting

Recessed Light

Temperature

-10°C to +45°C

Degree of protection

IP20




IS 10322
(Part 5/Sec 2) : 2012



R-93038270
www.bis.gov.in

Polar diagram



2 YEARS
WARRANTY



TECHNICAL DETAILS

Product Code	Wattage	CCT	CRI	Input Voltage	Tamp.	Dimensions(mm)		
						A	B	C
A45-18-W-R	18 W	3000 K	≥80	220 - 240Vac	1260 lm	159	28	50
A45-18-N-R	18 W	4000 K	≥80	220 - 240Vac	1350 lm	159	28	50
A45-18-C-R	18 W	6500 K	≥80	220 - 240Vac	1440 lm	159	28	50
A48-18-W-S	18 W	3000 K	≥80	220 - 240Vac	1260 lm	159	28	50
A48-18-N-S	18 W	4000 K	≥80	220 - 240Vac	1350 lm	159	28	50
A48-18-C-S	18 W	6500 K	≥80	220 - 240Vac	1440 lm	159	28	50

